

Model 6245

SOFT SERVE FREEZER

Application

Two Flavor with Twist for third combination flavor.
Countertop, Gravity or Pump Feed Soft Server Freezer
with Independent Refrigeration System for Each Cylinder.

Great for all soft serve ice cream, frozen yogurt, custards,
gelato and sorbet.

Freezing Cylinder

Two × 1.8 quarts each

Mix Hopper

Two Hoppers at 15.9 quarts each. Mix Agitation is
Optional. Separate hopper refrigeration maintains mix
temperature below 40°F.

Mix Low Indicator

When mix level is low, the Mix Low light turns “ON” to
alert operator to add mix. Compressor shut down setting
prevents freeze up or machine damage.

Standby

The standby feature maintains safe product temperature in
the mix hoppers and freezing cylinders below 40° during
long no-use periods.

Microprocessor Controls

Automatically regulates refrigeration and maintains
consistent product quality by controlling product
temperature and viscosity. Can be set to go into
standby automatically

Counter

Records number of dispenses per day and total
number of dispenses.

Temperature Display

Displays hopper and cylinder temperature.

Output

200 servings per hour. (Serving size 4 ounces by weight)

Safety Protections

- Low temperature sensors and motor overload circuit switch will protect the cylinder from over freezing
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat



Flexible Blade Beater
Higher capacity, higher overrun





MODEL 6245



AUTHORIZED DEALER
H&M Company USA, Inc.
700 Aldo Ave. • Santa Clara, CA 95054
sales@hmcompanyusa.com
www.HMCompanyUSA.com

U.S. IMPORTER:
SpaceMan International USA, Inc.
805-927-2257
info@spacemanusa.com
www.spacemanusa.com

MODEL 6245

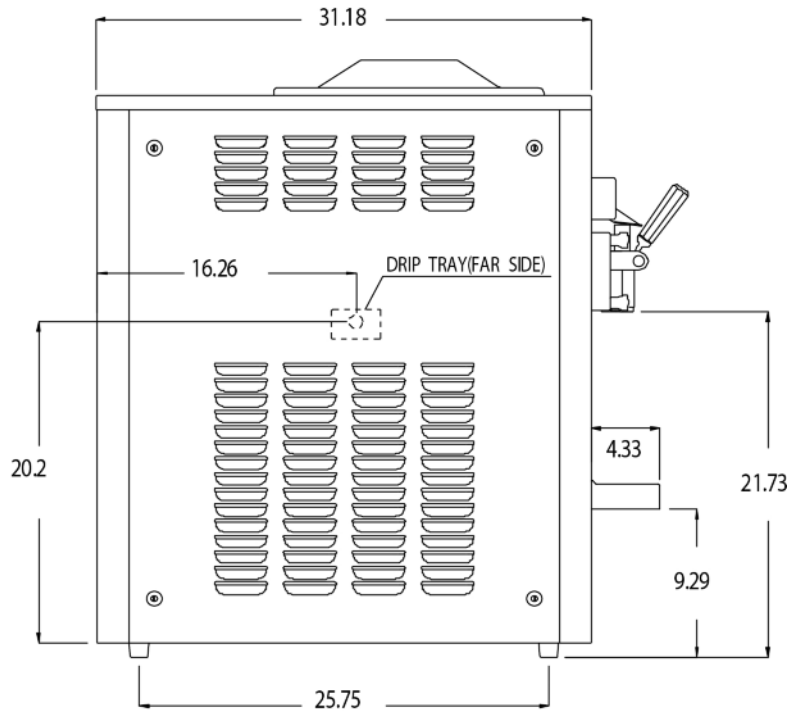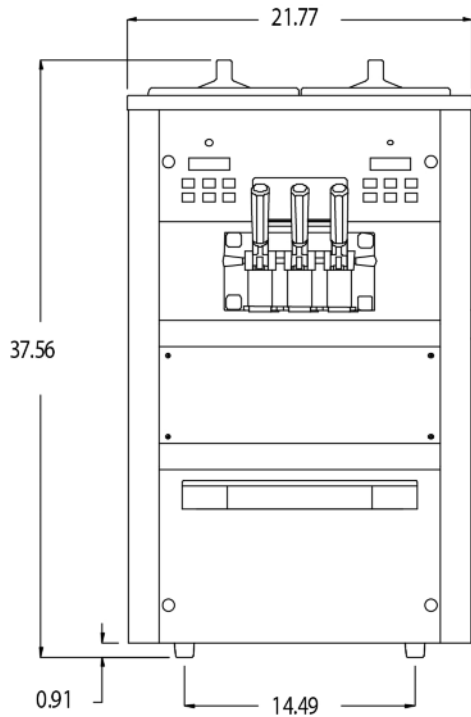

Specifications

Weight	Pounds
Net	430
Shipping	467

Packaging Volume	25 CBF
-------------------------	--------

Dimensions	Net - inches	Shipping - inches
Width	21.8	24.6
Depth	31.2	36.8
Height	37.6	45.1

Electrical	Fuse Size	Minimum Circuit Amp	Poles (P) Wires(W)
208-230/60/1	30	24	3P/3W
208-230/60/3	30	18	1/4W

This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability. (For exact electrical information, always refer to the data label of the unit.)

Note

Continuing research results in steady improvements, therefore, these specifications are subject to change without notice.

Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for receptacle specifications.

Beater Motor

Two @ 1.2 HP for 1 phase
Two @ 1 HP for 3 phase

Refrigeration System

Main refrigeration:
Two compressors: @ 4400 BTU/hr. R404a

Separate hopper refrigeration (S.H.R.):
One compressor: 480 BTU/hr. R134a

Air Cooled

To ensure adequate cooling, there must be a clearance of 6-inch on each side of this machine. The rear of the machine should have 6-inch clearance from the wall.

Optional up air vent available for flush fit on back .
Add 3" to depth.

Spaceman Factory in China is:
ISO 9001: 2008 Registered Firm

Spaceman machines are sold by Distributors in specific territories. Contact the Distributor responsible for your Territory.



For Sales & Service Contact:
H&M Company USA, Inc. (408) 899-9068 | sales@hmcompanyusa.com